



BLOTZ

28mm / 32mm Outhouse / Extension

B28-MD-102 / B32-MD-102

Please read these instructions fully before starting construction.


PVA or equivalent glue will be required to stick sections together.

Sand paper can be used to gently clean any joints.


A sharp modelling knife will be required to remove sections from the sprue. Please use knives with due care and remember to cut away from yourself at all times.

During the construction of this model, you may find it convenient to use pegs / elastic bands to hold pieces in place while you allow glue to dry.

You may find it easier to paint portions of this model **BEFORE** construction – please see the end of the document for info about this.

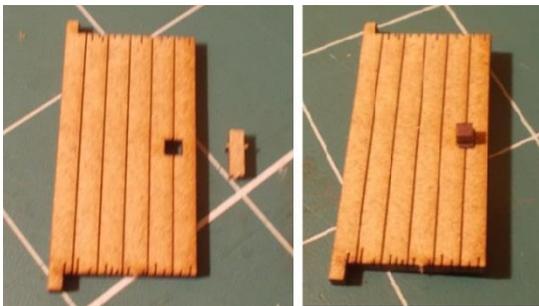

Remove the door and handle from the sprue and glue them together as shown.

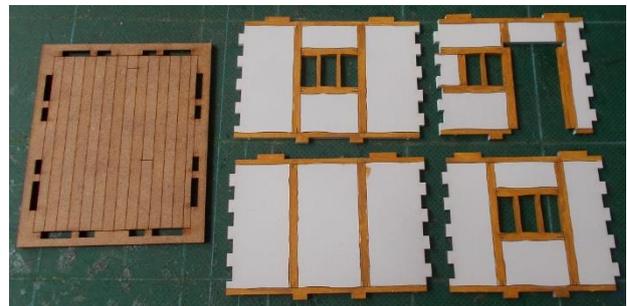

Take the floor and walls from the sprue (as seen above).



Glue the walls to the base with all the etched detail facing inwards.



Take the four lower frameworks from the sprue.



Starting with the door frameworks, glue this into place aligning the door supports into their spaces. Note: This piece will be flush to the left hand side of the wall and extend out by about 3mm on the right. Work round the building adding the other frames.




Glue one of the door supports to the base of the doorway with the hole on the left (see example pic)



Place the top support on top of the door and gently slide this into position as shown.



Then take the insert sections from the sprue and glue them into the spaces in the framework. Note the insert pieces for each wall are in their relative positions on the sprue.

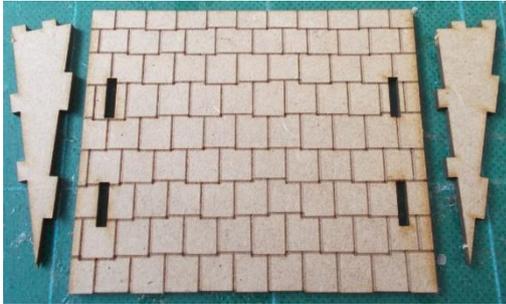


Take the roof and side pieces from the sprue.




Glue the supports to the back of the roof as shown, with the points towards the uneven edge of the roof.



Take the back piece.

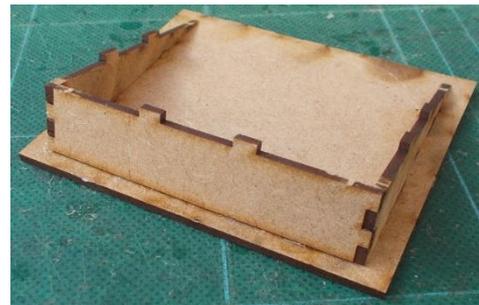

Glue this into position.

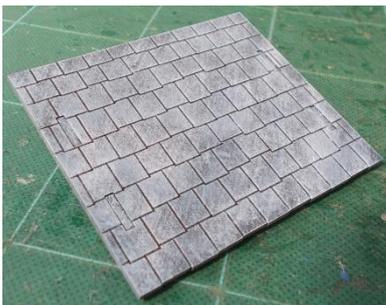

We suggest you paint your roof at this point.



Glue the roof plate into position.



The frames.



Glue these into place.



Add the insert pieces.




The finished model.

Painting

It is much easier to paint sections of this building prior to assembly.

For the inner walls we removed these from the sprue and then sprayed them white with a standard car undercoat spray paint. Once dry we then painted over the etched woodwork with a pale brown colour.

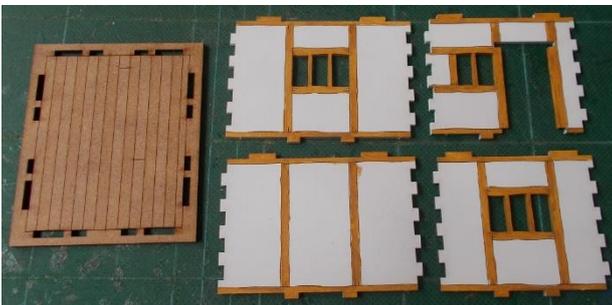

The outer frames and wooden floor remained unpainted.

The insert panels were all left on the sprue and also sprayed with white car undercoat.

The stonework panels were then painted black before being dry-brushed with grey DIY emulsion paint.

The roof was assembled then we sprayed the entire roof with a black car undercoat spray. Once that had dried we dry-brushed the whole roof with a various shades of grey DIY household emulsion paint.

